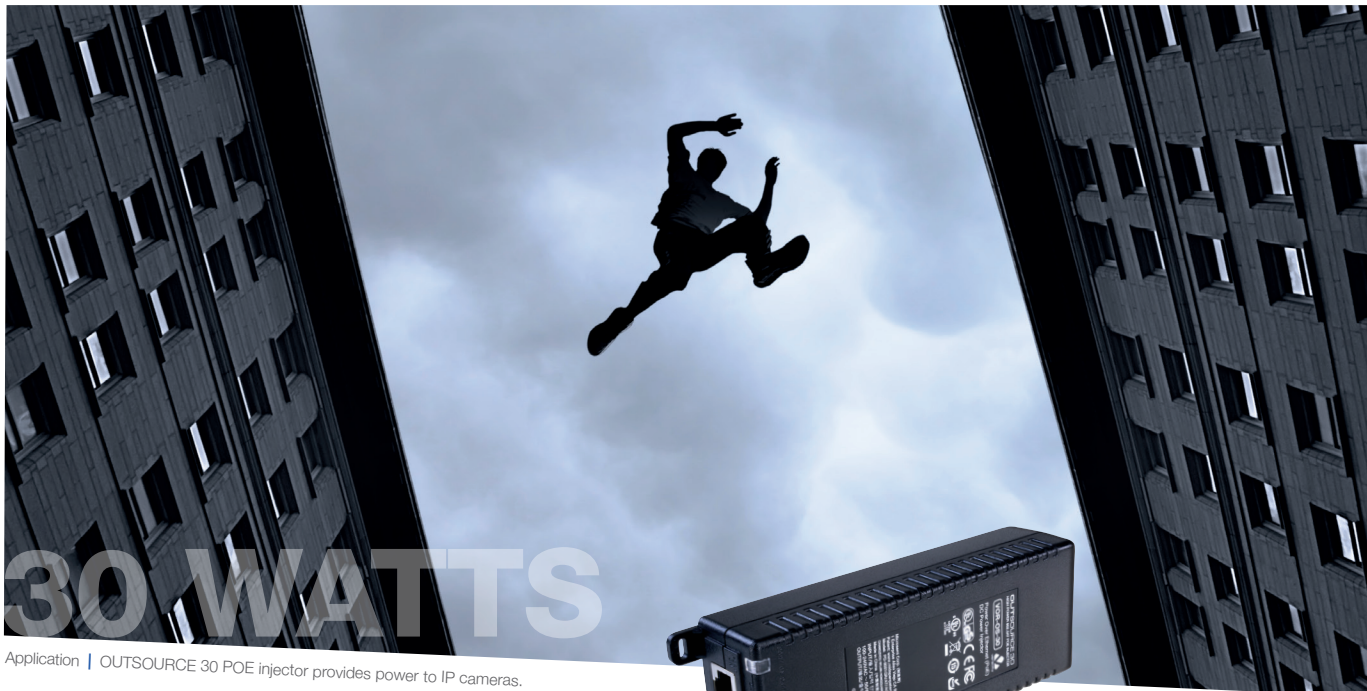


30W POWER OVER ETHERNET INJECTOR

OUTSOURCE™
30

Application | OUTSOURCE 30 POE injector provides power to IP cameras.

Compact POE injector that delivers reliable POE for IP cameras and devices

Delivers enhanced 30W POE to all 802.8af and 802.3at standard devices. OUTSOURCE 30 is GigE compatible and automatically detects compatible devices.

- | Delivers reliable remote power to IP cameras and POE devices
- | Compatible with gigabit Ethernet
- | Safety assured as POE is only enabled to compliant devices
- | 30W Power output
- | Compact, wall-mountable unit
- | Integrated overload protection
- | Sealed, fanless design for reliability

TECHNICAL SPECIFICATION

OUTSOURCETM
30

POWER	
Input voltage	100 to 240V AC, 50 to 60Hz
Maximum current	0.67A
FORWARDED POE POWER	
OUTSOURCE 30	30 watts (Output voltage 55V) Overload and short circuit protection Pin Assignment and Polarity, POE output on spare pairs 7/8 (-), 4/5 (+)
POE STANDARDS	
OUTSOURCE 30	IEEE 802.3af, IEEE 802.3at POE
ETHERNET INTERFACE	
	RJ45 Data IN port RJ45 Data & POE OUT port 10/100/1000 Base-T compatible
LED PORT INDICATORS	
	Yellow On Power is on Green On A remote device is connected Green Blinking Overload state or short-circuit
PHYSICAL / ENVIRONMENTAL	
Dimensions	L 161mm (inc mounting holes) W 52mm H 35mm [L 6.3in W 2.0in H 1.4in]
Weight	200g [7.06oz]
Mounting	Integral wall-mount lugs
Input connector	C14 Input connector
Operating temperature	-20°C to +40°C [-4°F to 104°F] at 30W -20°C to +55°C [-4°F to 131°F] at 22.5W
Relative humidity	10% to 90% non-condensing
Compliance	CE, FCC, UKCA RoHS, EN 55032 Class B, EN55024, VCCI, UL/EN/IEC 60950-1 (Ed2)
PRODUCT CODES	
VOR-OS-30-UK	OUTSOURCE 30 30W POE Injector with UK power cable
VOR-OS-30-US	OUTSOURCE 30 30W POE Injector with US power cable
VOR-OS-30-EU	OUTSOURCE 30 30W POE Injector with EU power cable



Veracity HQ
Prestwick International Aerospace Park
4 Dow Road
Prestwick
UK
KA9 2TU
Tel +44 (0) 1292 264967

www.veracityglobal.com
sales@veracityglobal.com

See www.veracityglobal.com website
for country and region specific contacts.